
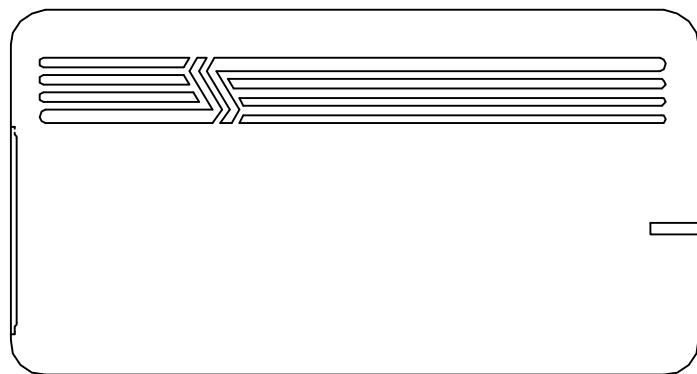
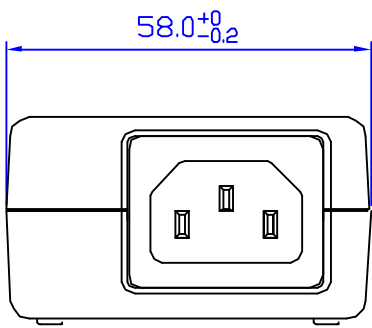
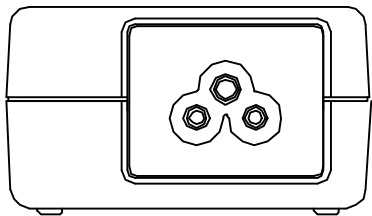



1 2 3 4 5 6 7

Inlet type

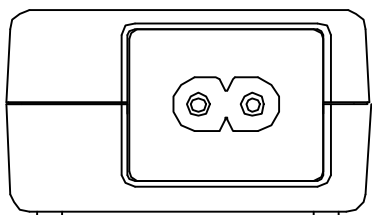

DC Output cable


Plug type




90° ϕ 2.5(ID) or ϕ 2.1(ID) * ϕ 5.5(OD)



180° ϕ 2.5(ID) or ϕ 2.1(ID) * ϕ 5.5(OD)

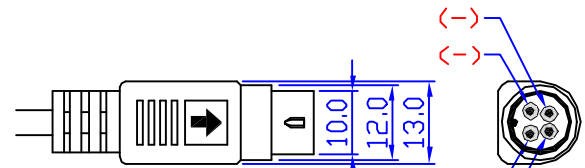

4pin POWER DIN

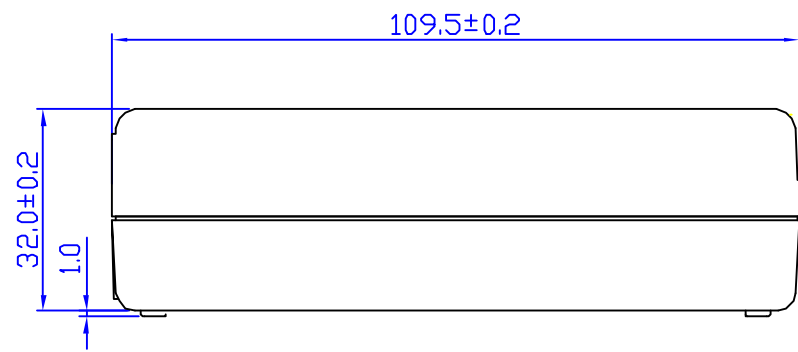

A
B
C
D

DESIGN CHANGE

COMMON TOLERANCE TABLE

SEA SONIC ELECTRONICS Co., Ltd.

ITEM	REASON OF CHANGE	DESCRIPTION

RANGE	<<A>>	<>	<<C>>	<<D>>
< 8	±0.05	±0.1	±0.2	±0.4
8~25	±0.1	±0.16	±0.3	±0.5
25~80	±0.2	±0.25	±0.5	±1.0
80~260	±0.3	±0.4	±0.8	±1.5
250~800	±0.5	±0.8	±1.5	±3.0
800~2500	±1.0	±1.5	±3.0	±6.0
ANGULAR	±0.15°	±0.3°	±0.5°	±0.6°

FILE NO	Adaptor-ASM	REV. NO	A0	DRAW BY	Tony
PART NO		SCALE	1:1	APPROVE BY	
PART NAME	ASM	UNITS	M/M	DATE	07/04/2002
MODEL NO	Adaptor(040/050/060)	MATERIAL	SE-100	PROJECTION	
PATH					